

Voltage	: 12.8 Volt
Appr. dimensions	: 151x98x95/101 mm (LxWxH) (±2%)
Terminal	: Faston 250
Container & lid	: Flame Retardant ABS
Operating temperature	
Charge	: -30°C ~ 60°C
Discharge	: -30°C ~ 60°C
Storage	: -30°C ~ 50°C

The rechargeable LiFePO<sub>4</sub> battery employs lithium iron phosphate as its cathode and carbon as its anode. The electrolyte salt dissolves in organic compound solvent and the electrolyte system is absorbed by the separators and the plates. All batteries of this type have a special one-way valve to allow the disaggregate-tire solvent gases to escape. The nominal cell voltage is 3.2V. Four cells are placed in series in order to create 12.8V.

To protect the battery from over charging and over discharging the battery is equipped with an internal battery management system (BMS). The BMS also takes care of the balance between the internal cell.

To avoid overheating of the battery, a special insertion, called PTC, is added to the electrolyte. This additive neutralizes the electrolyte and disables the battery permanently if the internal temperature exceeds 80°C.

**General features**


- More than 2000 deep cycles, LiFePO<sub>4</sub> offers the lowest life-cycle costs, using a grafito anode.
- The battery may be installed in any direction, upside down is not recommended
- Excellent high-rate discharge an recharge capabilities
- Third the weight of an equivalent lead acid battery
- Long service life in floating application
- Maintenance free operation
- Excellent safety
- Environmental friendly due to the absence of heavy metals

**Typical Applications:**

- Windmills
- Medical applications
- Household appliances
- Garden tools
- Health care
- Sensors
- Measurement devices

Specifications		LFP 12-12	LFP 15-12
Nominal Capacity		12 Ah	15 Ah
Weight (appr.)		1.6 Kg	1.9 Kg
Internal Resistance		<45mΩ	<38mΩ
Specific Energy		96 Wh/Kg	101 Wh/Kg
Standard Discharge at 25°C	Max. Cont. Current	20A	20A
	Max. 30 sec. pulse	30A	30A
	Cut off Voltage	9.6V	9.6V
Standard Charge	Charge Voltage	14.8V	14.8V
	Float	13.8V	13.8V
	Style	CC/CV	CC/CV
	Recommended Charge Time	6A	7.5A
		2.5h	2.5h

Note: Do not use more than four batteries in series  
For details: please consult our technical staff

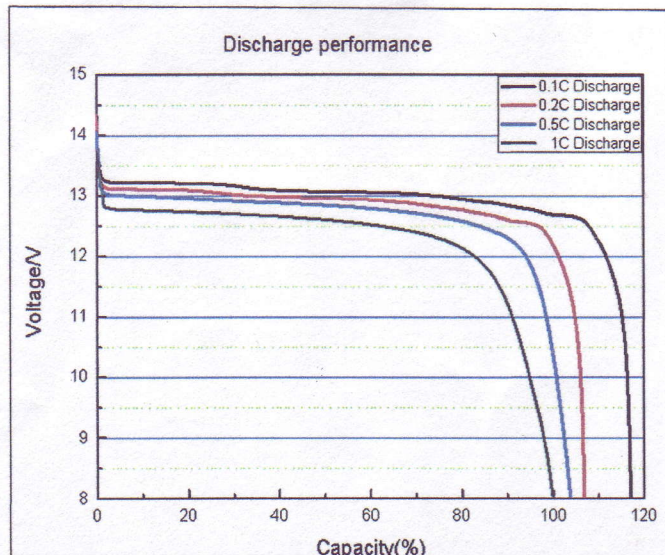

aeroakku.com  
info@aeroakku.com